

Spring-return actuator, combined with thermoelectric tripping device BAT (72 °C), for fire and smoke dampers 90° in ventilation and air-conditioning systems.

- Nominal Torque 4 Nm / 3 Nm
- Nominal voltage AC 230 V
- Control Open-close
- Spindle driver Form fit 12x12 mm, Continuous hollow shaft


**Technical data**

<b>Electrical data</b>	Nominal voltage	AC 230 V	
	Nominal voltage frequency	50/60 Hz	
	Nominal voltage range	AC 198...264 V	
	Power consumption in operation	3.5 W	
	Power consumption in rest position	1.1 W	
	Power consumption for wire sizing	6.5 VA	
	Power consumption for wire sizing note	Imax 4 A @ 5 ms	
	Auxiliary switch	2 x SPDT	
	Switching capacity auxiliary switch	1 mA...3 (0.5 inductive) A, AC 250 V	
	Switching points auxiliary switch	5° / 80°	
	Connection supply / control	Cable 1 m, 2 x 0.75 mm <sup>2</sup> (halogen-free)	
	Connection auxiliary switch	Cable 1 m, 6 x 0.75 mm <sup>2</sup> (halogen-free)	
	Cable length thermoelectric tripping device	0.5 m	
	<b>Functional data</b>	Torque motor	Min. 4 Nm
Torque spring return		Min. 3 Nm	
Direction of rotation motor		Can be selected by mounting L/R	
Manual override		With position stop	
Angle of rotation		Max. 95°	
Running time motor		<60 s / 90°	
Running time spring-return		20 s @ -10...55 °C / <60 s @ -30...-10 °C	
Sound power level motor		<43 dB(A)	
Sound power level spring-return		<62 dB(A)	
Spindle driver		Form fit 12x12 mm, Continuous hollow shaft	
Position indication		Mechanically, with pointer	
Service life		Min. 60,000 safety positions	
<b>Safety</b>		Response temperature thermal fuse	Duct outside temperature 72 °C Duct inside temperature 72 °C
	Protection class IEC/EN	II Protective insulated	
	Protection class auxiliary switch IEC/EN	II Protective insulated	
	Degree of protection IEC/EN	IP54 in all mounting positions	
	EMC	CE according to 2014/30/EU	
	Low voltage directive	CE according to 2014/35/EU	
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-14	
	Mode of operation	Type 1.AA.B	
	Rated impulse voltage supply / control	4 kV	
	Control pollution degree	3	
	Ambient temperature normal operation	-30...55 °C	
	Ambient temperature safety operation	The safety position will be attained up to max. 75 °C	
	Non-operating temperature	-40...55 °C	
	Ambient humidity	95% r.h., non-condensing	
	Maintenance	Maintenance-free	
	<b>Weight</b>	Weight	1.2 kg

## Safety notes



- The device must not be used outside the specified field of application, especially not in aircraft or in any other airborne means of transport.
- Caution: Power supply voltage!
- The actuator is adapted and installed on the fire and smoke damper by the damper manufacturer. For this reason, the actuator is only supplied directly to safety damper manufacturers. The manufacturer then bears full responsibility for the proper functioning of the damper.
- The two switches integrated in the actuator are to be operated either on power supply voltage or at safety extra-low voltage. The combination power supply voltage/safety extra-low voltage is not permitted.
- Cables must not be removed from the device.
- The device may only be opened at the manufacturer's site. It does not contain any parts that can be replaced or repaired by the user.
- The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

## Product features

<b>Mode of operation</b>	The actuator moves the damper to the operating position at the same time as tensioning the return spring. The damper is turned back to the safety position by spring energy when the supply voltage is interrupted.
<b>Safety Position Lock</b>	The Safety Position Lock™ reliably holds the fire damper in the safety position in case of fire therefor ensuring maximum safety. The technical solution for this function of the BFL and BFN actuators has a patent pending.
<b>Thermoelectric tripping device</b>	Complies with the specific requirements of the standard ISO 10294-4. BAT: If the ambient temperature of 72°C is exceeded, then the duct outside temperature fuse will respond. If the duct inside temperature of 72°C is exceeded, then the duct inside temperature fuse will respond. When one of the thermal fuses responds, the supply voltage is interrupted permanently and irreversibly. The LED is on when <ul style="list-style-type: none"> <li>- supply voltage is available</li> <li>- the thermal fuses are OK and</li> <li>- the test switch is not pressed.</li> </ul> Note: The function of the thermal fuses and the control key is only warranted if the actuator is connected to the supply voltage (LED on).
<b>Signalling</b>	Two microswitches with fixed settings are installed in the actuator for indicating the damper end positions. The electrical contacts of these microswitches are equipped with a gold/silver coating that permits integration both in circuits with low currents (mA range) and in ones with larger-sized currents (A range) in accordance with the specifications in the data sheet. It should be noted with this application however that the contacts can no longer be used in the milliamperere range after larger currents have been applied to them, even if this has taken place only once. The position of the damper blade can be read off on a mechanical position indication.
<b>Manual operation</b>	Without power supply, the actuator can be operated manually and fixed in any required position. It can be unlocked manually or automatically by applying the supply voltage.
<b>Standards / regulations</b>	The design of the actuator is based on the specific requirements from the European standards: <ul style="list-style-type: none"> <li>- EN 15650 Ventilation for buildings – Fire dampers</li> <li>- EN 1366-2 Fire resistance tests on service installations (Part 2: Fire dampers)</li> <li>- EN 13501-3 Fire classification of construction products and building elements (Part 3: Classification using data from fire resistance tests on products and elements used in building service installations: fire resisting ducts and fire dampers)</li> </ul>

**Product features**

**Recommendation for application** Regular operational checks (open-close control of the fire damper) enhance the safety of people, animals, property and the environment. Unless other requirements are stipulated – e. g. in the damper manufacturer’s operating instructions – Belimo recommends the performance of monthly operational checks. Fire damper actuators from Belimo are designed in accordance with service life specifications contained in the technical data sheet for regular operational checks. Notes for regular operational checks can be found in the European Product Standard for Fire Dampers (EN 15650) under “Maintenance information”.

**Delivery notes** Incl. Hand crank, Pointer, Protective bag, Form fit insert 12/10 mm

**Accessories**

	Description	Type
<b>Electrical accessories</b>	Communication and power supply unit for integration in Modbus networks, for 230 V actuators	BKN230-MOD
	Auxiliary switch 2 x SPDT	SN2-C7
	Blanking cover for BAT (without thermal fuse for duct inside temperature)	ZBAT0
	Spare tripping element for BAT, duct inside temperature = 72 °C, sensor length = 65 mm	ZBAT72
	Spare tripping element for BAT, duct inside temperature = 72 °C, sensor length = 90 mm	ZBAT72/9
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 65 mm	ZBAT95
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 65 mm (20 pcs.)	ZBAT95.1
	Spare tripping element for BAT, duct inside temperature = 95 °C, sensor length = 90 mm	ZBAT95/9
	Spare tripping element for BAT, duct inside temperature = 120 °C, sensor length = 65 mm	ZBAT120
	Description	Type
<b>Mechanical accessories</b>	Bracket for auxiliary switch (SN2-C7) for BFL, BFN	ZSN-B


**Electrical installation**

**Notes**

- Caution: Power supply voltage!
- The actuator must be protected by a fuse that does not exceed 16 A.
- Parallel connection of other actuators possible. Observe the performance data.
- Combination of power supply voltage and safety extra-low voltage not permitted at the both auxiliary switches.

**Wiring diagrams**

AC 230 V, open-close

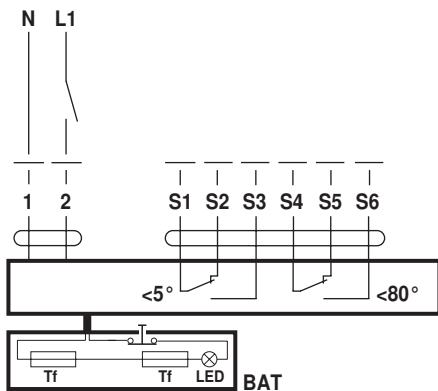

**Cable colours:**  
 1 = blue  
 2 = brown  
 S1 = violet  
 S2 = red  
 S3 = white  
 S4 = orange  
 S5 = pink  
 S6 = grey  
 Tf: Thermal fuse (see “Technical data”)

Dimensions [mm]

Dimensional drawings

